


# DOBBEL VARMTVANNSVASKER

Offshore

Sone 1 T4 tempklasse

Iht. Norsok Z-015

DNV 2.7-1 ramme, slings og sjakler

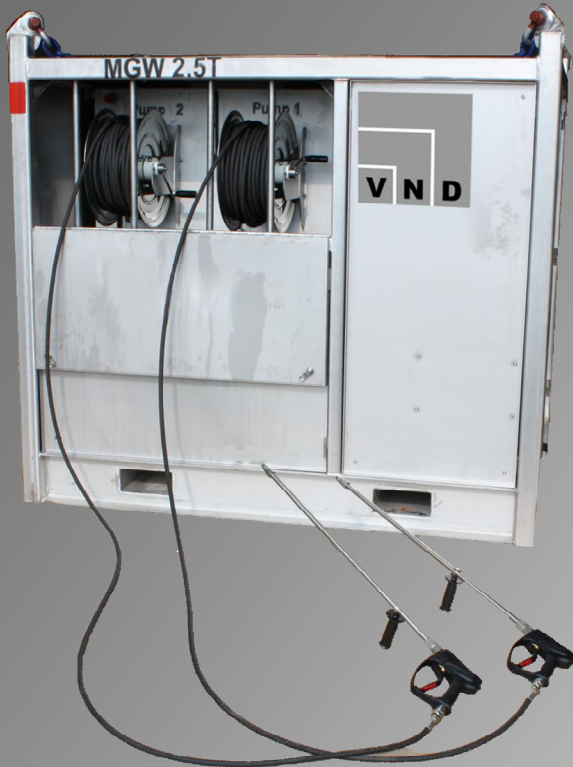

- Dimensjoner:
  - L: 2000 mm
  - B: 1300 mm
  - H: 1875 mm
- Vekt:
  - MGW 2500 kg
- Løfting / Transport:
  - Ramme med trucklommer og løfteskrev
- 2 stk slangetrommler med 50m 3/8" slanger og spylerpistoler.
  
- Tankvolum:
  - 500 L
- Q maks. 60 Hz:
  - 2 x 26 l/min
- Q maks 50 Hz:
  - 2 x 22 l/min
- P maks. 60/50 Hz:
  - 200 bar
- Maks vanntemperatur:
  - 60° C



- Tilkobling inn:
- Offshore tilkobling
- Anbefalt forankoplet sikring:
  - 2 x 63A
- Spenningsområde:
  - 380 – 690 V
  - 50 – 60 Hz



- Pumpe: Udor GKD 7.0/40S plungerpump
- Motor: 2 x 11 kW
- Heater: 71 kW @ 480 V